IW-R300 Chassis Quick Reference

Major Components

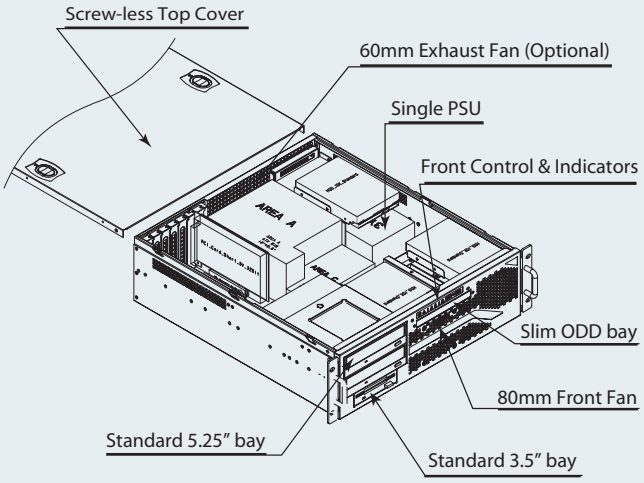

Front Panel Controls and Indicators

A: USB 2.0 Port
B: System Reset Button
C: System HDD Activity LED
D: Power LED
E: Alarm Notification LED
F: LAN1 LED
G: LAN2 LED
H: Power Button

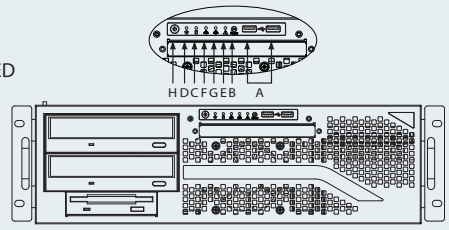

Rear Window Configuration

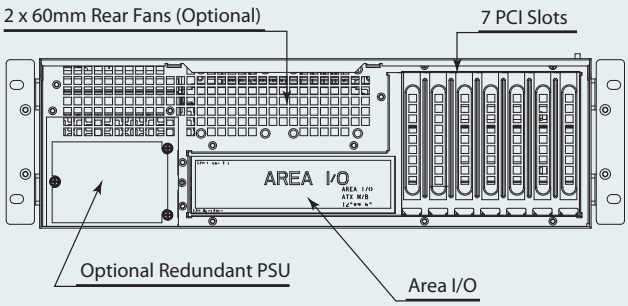

Top Cover Opening

CAUTION

This unit must be operated with the chassis **TOP COVER** installed to ensure proper cooling.

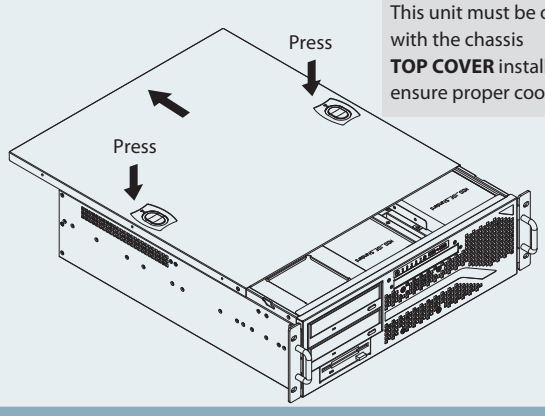

5.25", 3.5" & Slim ODD Front Cover Opening

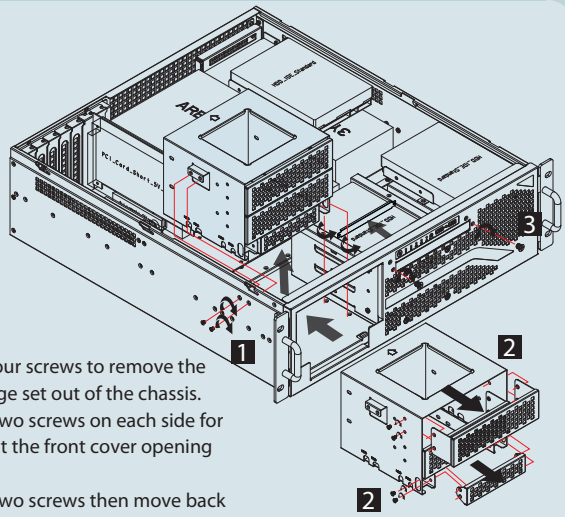

1. Release four screws to remove the whole cage set out of the chassis.
2. Remove two screws on each side for taking out the front cover opening bracket.
3. Remove two screws then move back and take out the cover bracket.

Installing 5.25", 3.5" & Slim ODD Devices

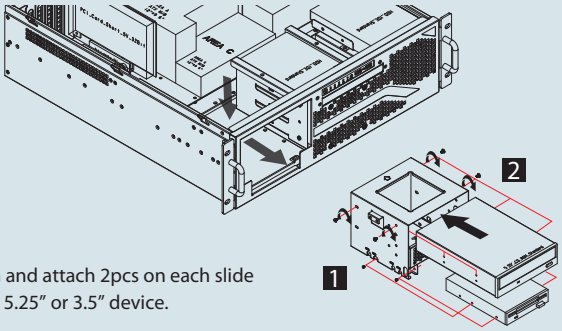

1. Slide in and attach 2pcs on each slide screws 5.25" or 3.5" device.

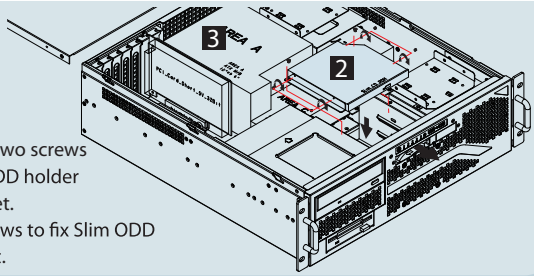

2. Attach with two screws to fit Slim ODD holder metal bracket.
3. Use four screws to fix Slim ODD assembly set.

3.5" Device Cage & Trays Installing Hard Drive

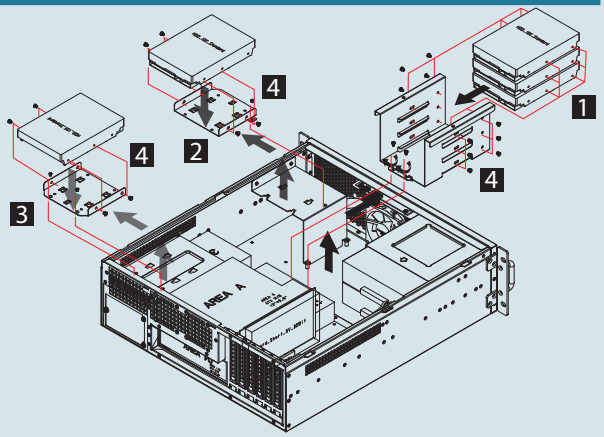

1. Release two screws to remove the cage out for 3.5" HDD device Installation.
2. Release one screw only to remove the HDD tray.
3. Release two screws to remove the HDD tray.
4. Attach with four screws to fix HDD on the cage or the trays.